




Fabweld Steel Products Ltd

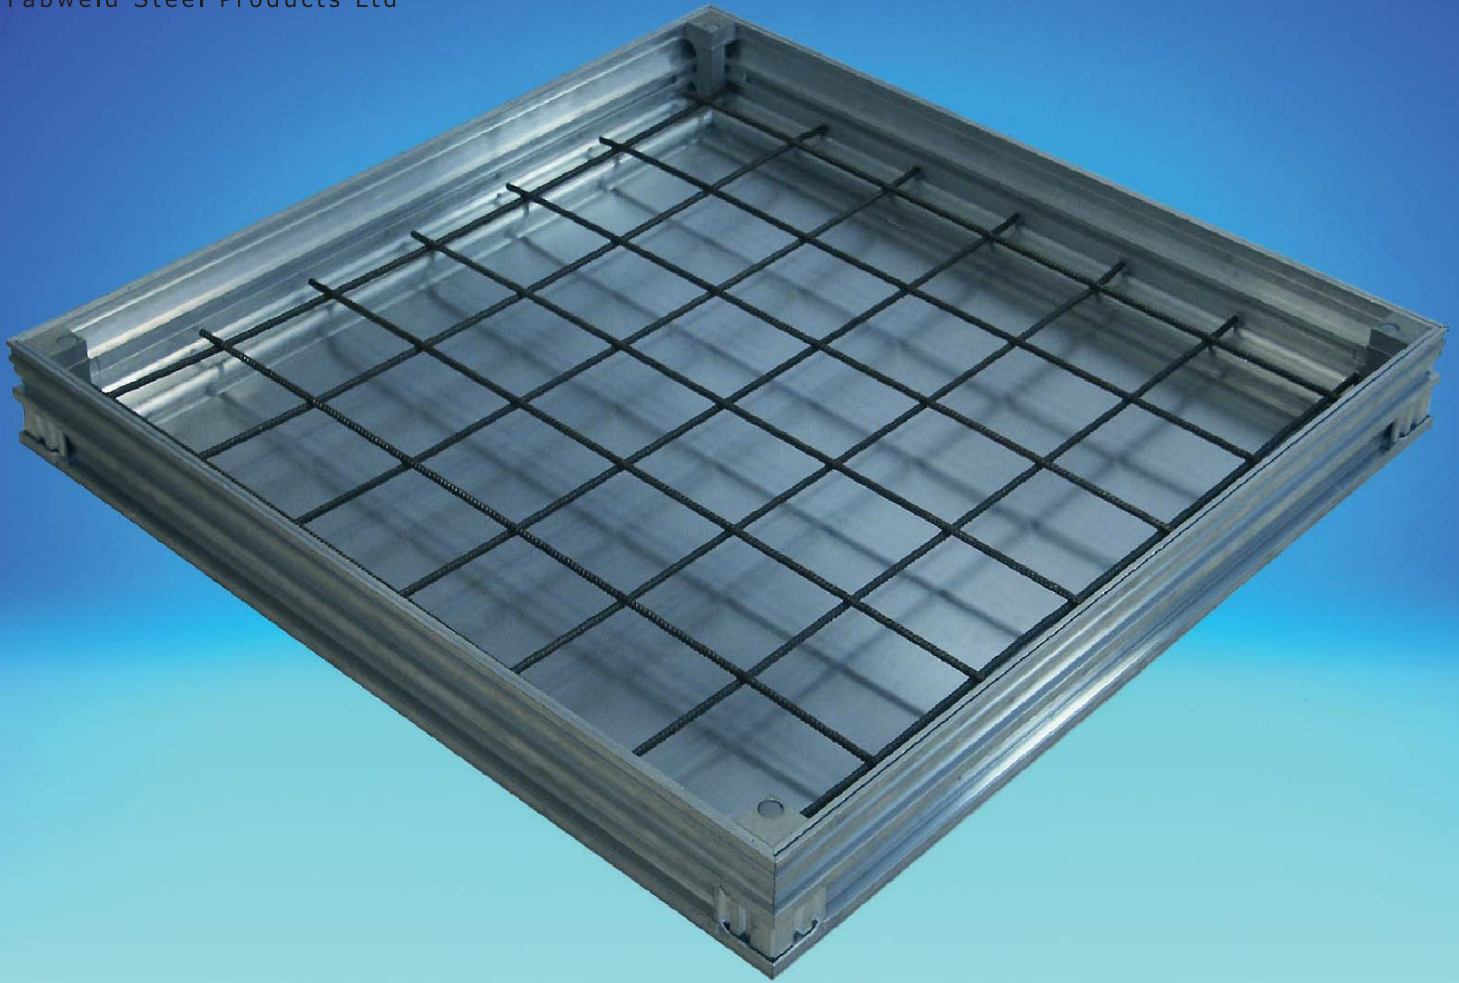

Premier Stockist and Distributor of the ACO ALUCOVER

CONTRIBUTING
TO A RESULT



FABRICATED
ACCESS COVERS
TRADE ASSOCIATION



Fabweld Steel Products Ltd





Fabweld Steel Products Ltd

ACO Alucover Recessed Aluminium Access Covers

High quality light weight unfilled recessed aluminium access covers for internal and external applications

Features and Benefits

- ▶ **Double sealed single cover**
- ▶ **Integrated grit seal prevents full ingress of grit and silt between cover and frame**
- ▶ **4-point locking with integrated low profile corner locking blocks. Captive replaceable brass nuts and stainless steel locking screws complete with protective caps provided**
- ▶ **8mm x 100mm centres square steel reinforcement fabric mesh with captive supports ensures mesh remains with cover during site handling and installation**
- ▶ **Precision manufacture ensures minimal gap between frame and cover providing high quality, unobtrusive visual finish**
- ▶ **Low profile, 73mm overall depth frame for easy installation**
- ▶ **Advanced mechanical assembly process provides rigid frame and cover construction with no weld heat distortion**
- ▶ **2 combined jacking and lifting keys supplied as standard for easy and convenient cover removal and replacement. Supplied complete with installation instructions and packaging**

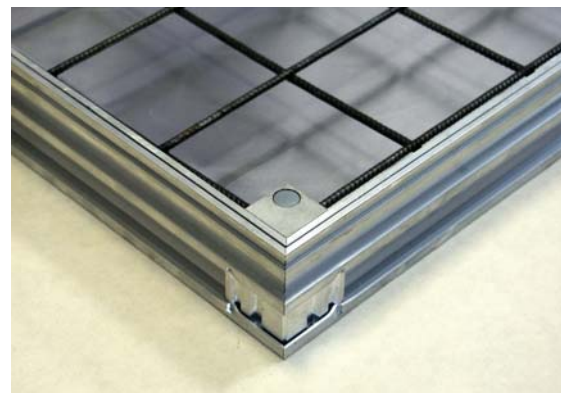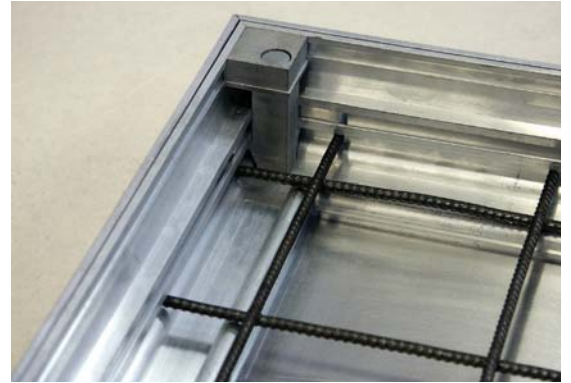

Part No	Clear Opening (mm)	Overall Size w x l x h (mm)	Unfilled Wt kg	Approx Cover Wt (fully filled) kg	FACTA Load Class (50mm concrete infill)	FACTA Load Class (70mm concrete infill)
RET00817	300 x 300	398 x 398 x 73	4	13	AAA	B
RET00818	450 x 450	548 x 548 x 73	6	29	AA	B
RET00819	600 x 450	698 x 548 x 73	7	39	AA	B
RET00820	600 x 600	698 x 698 x 73	8	53	AA	B
RET00920	675 x 675	773 x 773 x 73	10	64	A	AAA
RET00821	750 x 600	848 x 698 x 73	10	66	AA	B
RET00823	750 x 750	848 x 848 x 73	11	83	A	AAA
RET00822	900 x 600	998 x 698 x 73	11	80	AA	B
RET00921	1000 x 1000	1098 x 1098 x 73	16	150	A	AA
RET00922	1220 x 675	1318 x 773 x 73	23	58	A	AAA

Note: Load Class figures assume cover filled to depths shown with fully cured concrete to Strength Class C25/30. Additional lifting key, Part No COM00338. Replacement plastic screw cap, Part No COM00350. Replacement locking screw part number COM00066. All part coded products are ex-stock.

Fabweld Steel Products Ltd

Units D11-D13 Court 2000, Bridgnorth Road, Madeley, Telford, Shropshire TF7 4JB

Tel: 01952 581430 Fax: 01952 586141

e-mail: sales@manholes.co.uk

Website: www.manholes.co.uk



Fabweld Steel Products Ltd