




Tel: 01952 581430 | Fax: 01952 586141  
www.manholes.co.uk | sales@manholes.co.uk

Fabweld Steel Products Ltd  
Value and service for our customers through our people

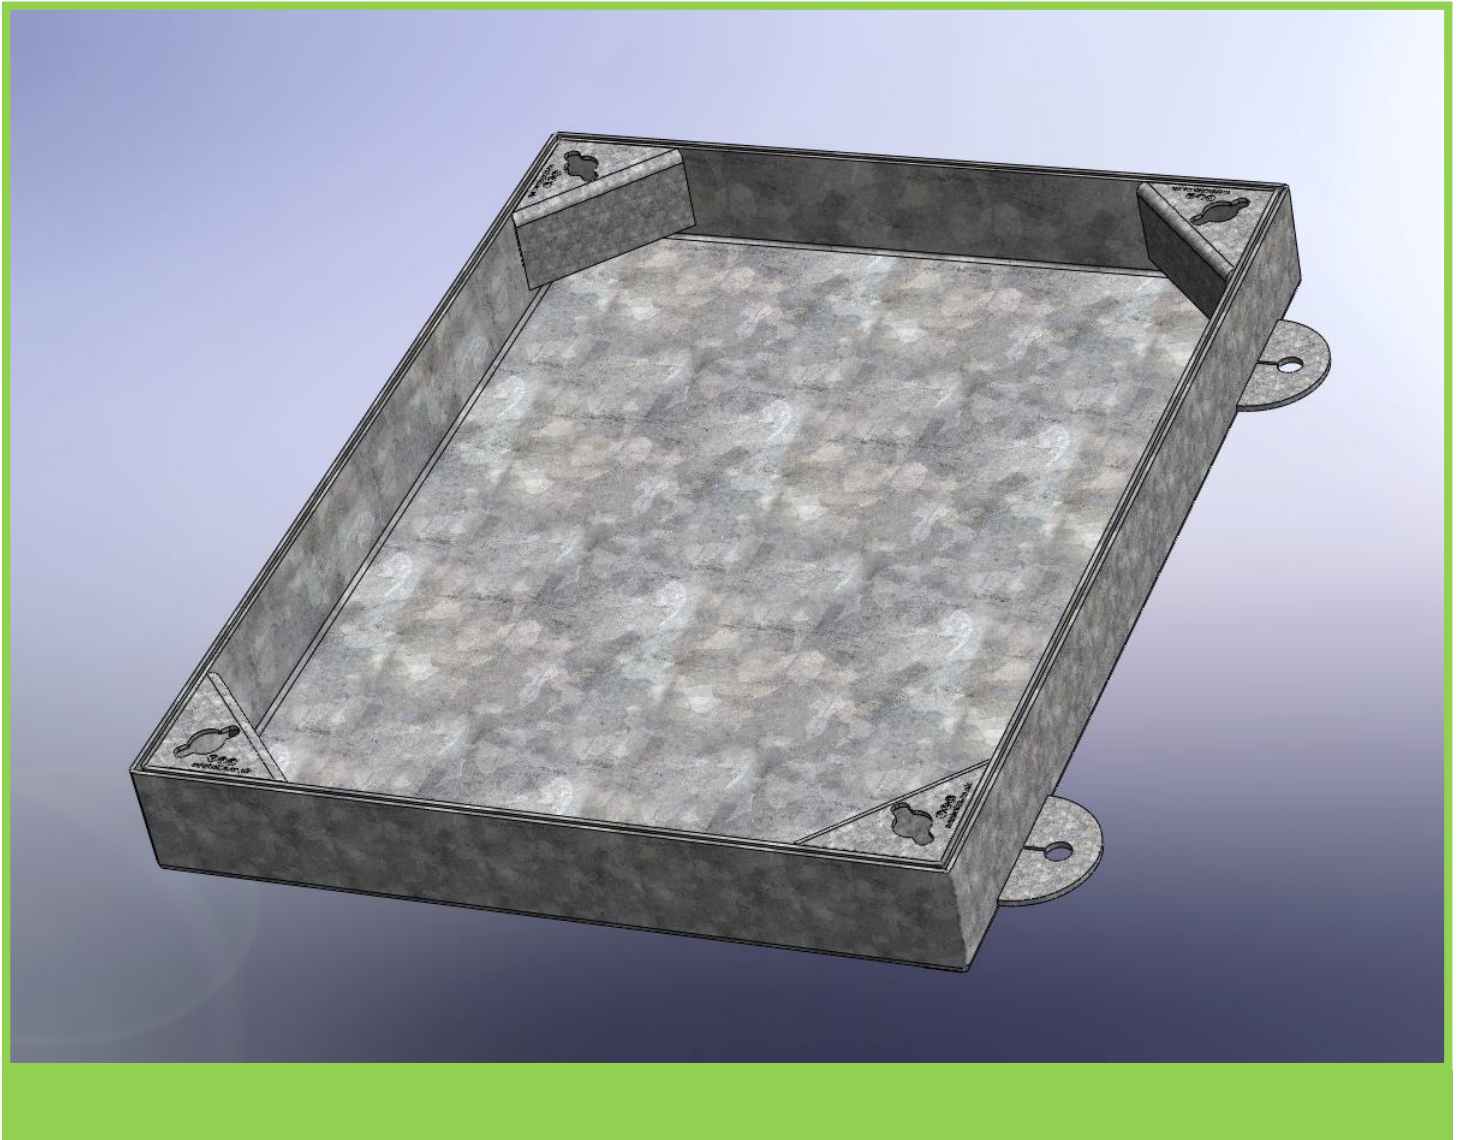

## FAB PAVE S20




Certificate No: 1678



## FAB PAVE S20

### Features and Benefits

- Manufactured from high grade mild steel
- Ideal for light industrial areas, shopping malls including pedestrian & cycle areas
- 100mm recess can accommodate a range of infills to blend with surrounding area
- Robust keyway accepts industry standard lifting keys
- Tapered sides of covers facilitate easy removal of cover from frame
- Bolt fixing secures frame to maximise performance
- Tested unfilled to FACTA class AAA
- Hot Dip Galvanised to BS EN: ISO1461
- Manufactured in accordance to ISO: 9001 quality system

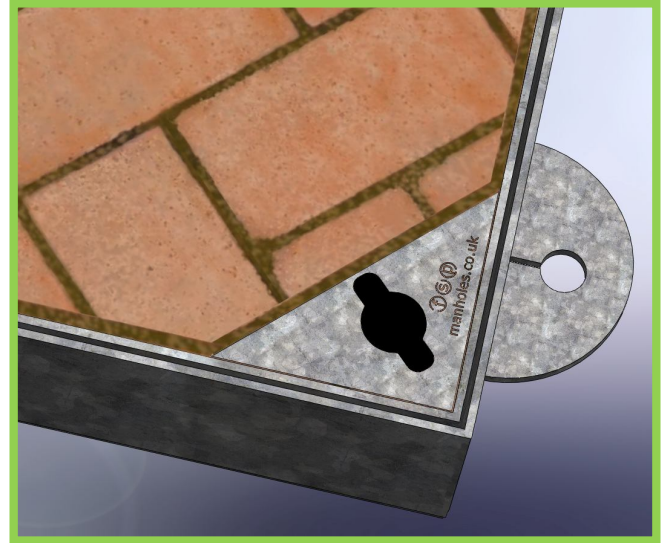

### Standard Clear Openings

Part Number	Clear Opening (mm)	Overall Size (mm)	Minimum Rebate Required (mm)	Unfilled Weight (kg)	Approx. Filled Weight (kg)	FACTA Load Class
FPC0000249	300x300	366x366x106	106x83	6.69	24.01	AAA
FPC0000250	450x300	516x366x106	106x83	7.89	31.31	AAA
FPC0000251	450x450	516x516x106	106x83	9.84	43.12	AAA
FPC0000252	600x450	666x516x106	106x83	11.79	54.94	AAA
FPC0000253	600x600	666x666x106	106x83	14.42	70.36	AAA
FPC0000254	750x600	816x666x106	106x83	19.50	88.24	AAA
FPC0000256	750x750	816x816x106	106x83	21.80	103.33	AAA
FPC0000257	900x600	966x666x106	106x83	22.99	107.44	AAA
FPC0000258*	1200x600	1266x666x106	106x83	16.31	69.87	AAA
FPC0000259*	1220x675	1286x741x106	106x83	17.93	78.56	AAA

### FACTA Classification Table

Load Classification	EN124 Comparison	Applicable SMWL	Application
AAA	--	2.5 tonne	Pedestrian/Cycle areas, Driveways, Patios, Delivery & Service areas, Shopping malls & light industrial areas

### Accessories

Lifting Key: **COM00048**  
Plastic Keyway Protection Caps: **COM00182**  
Frame Fixing Bolts: **COM00309**

### Bespoke

The FAB PAVE S20 is part of our configurable range of products and can be supplied to suit infills between 60-150mm depth. Products in this range can be provide in any dimension up to a 1000mm span and are available with bespoke options for the provision of threaded lifting points and flanges.

For more information contact our sales team on **01952 581430** or [sales@manholes.co.uk](mailto:sales@manholes.co.uk)

**NOTE** \*Denotes two part covers, the weights displayed are per cover