




Fabweld Steel Products Ltd  
Value and service for our customers through our people

Tel: 01952 581430 | Fax: 01952 586141  
www.manholes.co.uk | sales@manholes.co.uk

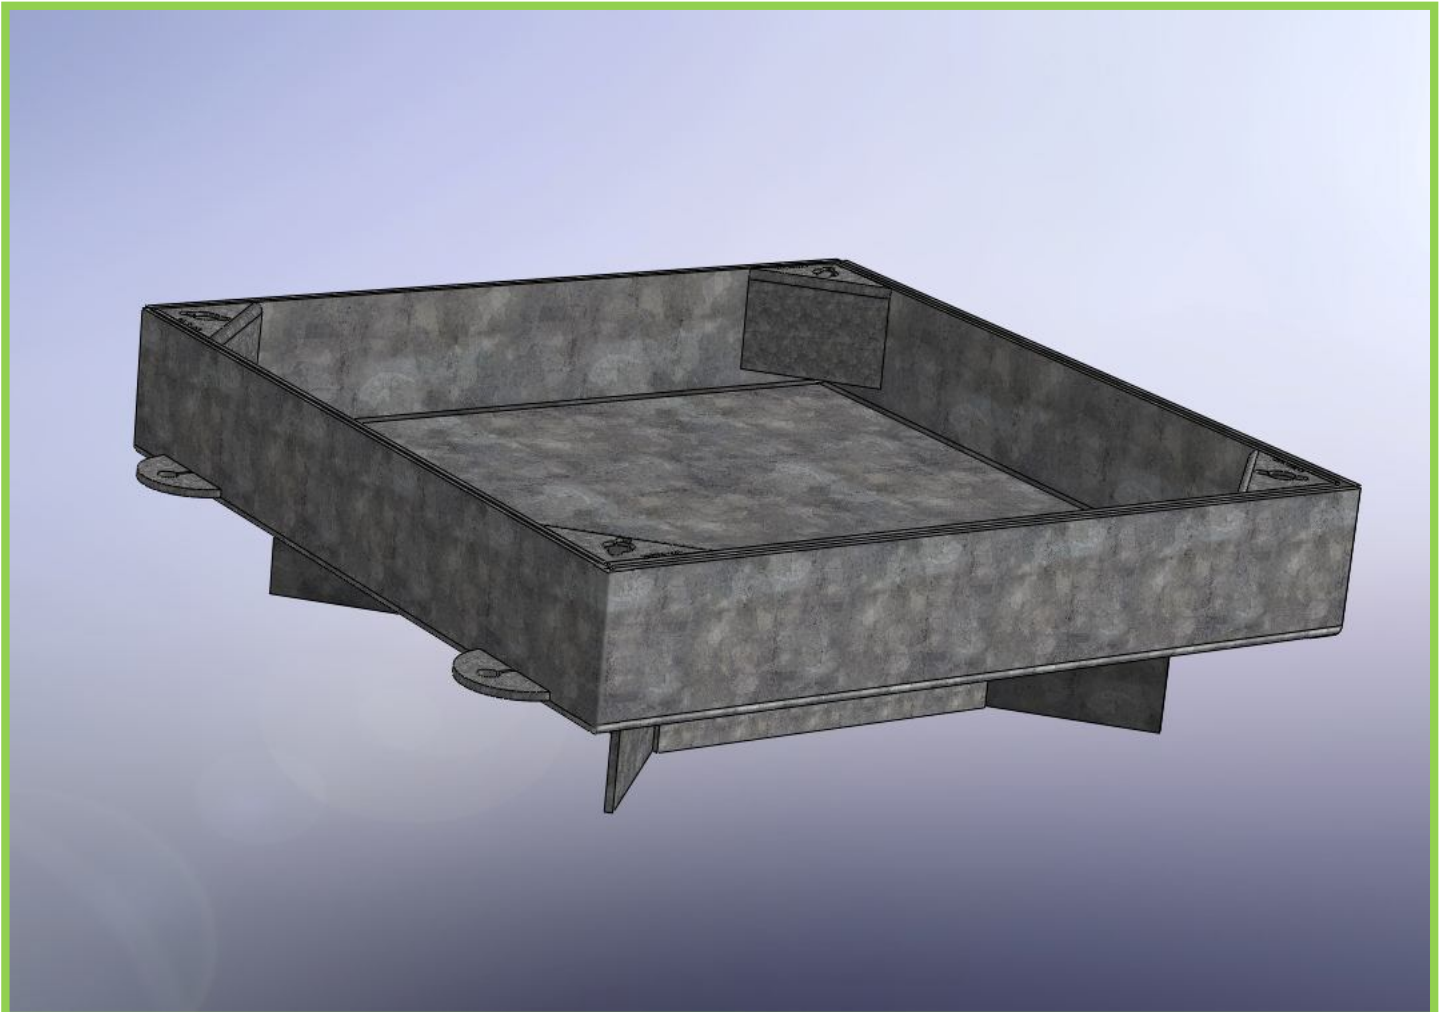

## FAB PAVE S40




Certificate No: 1678



## FAB PAVE S40

### Features and Benefits


- Manufactured from high grade mild steel
- Ideal for heavy duty plant & industrial areas & slow moving carriageways
- 100mm recess can accommodate a range of infills to blend with surrounding area
- Robust keyway accepts industry standard lifting keys
- Tapered sides of covers facilitate easy removal of cover from frame
- Bolt fixing secures frame to maximise performance
- Tested unfilled to FACTA class D
- Hot Dip Galvanised to BS EN: ISO1461
- Manufactured in accordance to ISO: 9001 quality system

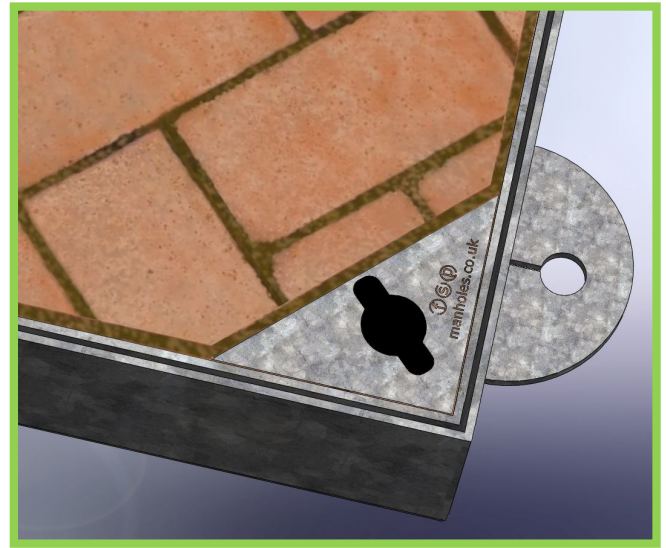

### Standard Clear Openings

Part Number	Clear Opening (mm)	Overall Top of frame (mm)	Minimum Rebate Required (mm)	Product Weight Unfilled (kg)	Approx. Filled Weight per cover (kg)	FACTA Load Class
FPC0000746	450x450	520x520	112x85	36	65	D
FPC0000747	600x450	670x520	112x85	43	83	D
FPC0000748	600x600	670x670	112x85	51	106	D
FPC0000749	675x675	745x745	112x85	59	129	D
FPC0000750	750x600	820x670	112x85	59	127	D
FPC0000751*	750x750	820x820	112x85	83	82*	D
FPC0000752*	900x600	970x670	112x85	78	79*	D
FPC0000753*	1200x600	1270x670	112x85	94	102*	D
FPC0000755*	1220x675	1290x745	112x85	102	115*	D

### FACTA Classification Table

Guide	EN124 Comparison	Applicable SMWL	Applicable GLVW	Application
	D400	11.0 tonne	Up to 44 tonne	Heavy duty plant areas, Slow moving carriageways & Industrial areas where medium duty fork-lift trucks operate

### Accessories

Lifting Key: **COM00048**

Plastic Keyway Protection Caps: **COM00182**

Frame Fixing Bolts: **COM00309**

Threaded Lifting Key: **COM00310** (only necessary when a threaded lifting point is present)

### Bespoke

The FAB PAVE S40 is part of our configurable range of products and can be supplied to suit infills between 100-150mm depth. Products in this range can be provided in any dimension up to a 1000mm span and are available with bespoke options for the provision of threaded lifting points and flanges.

For more information contact our sales team on **01952 581430** or **sales@manholes.co.uk**

**NOTE** \*Denotes two part covers, the weights displayed are per cover