




Tel: 01952 581430 | Fax: 01952 586141
www.manholes.co.uk | sales@manholes.co.uk

Fabweld Steel Products Ltd
Value and service for our customers through our people

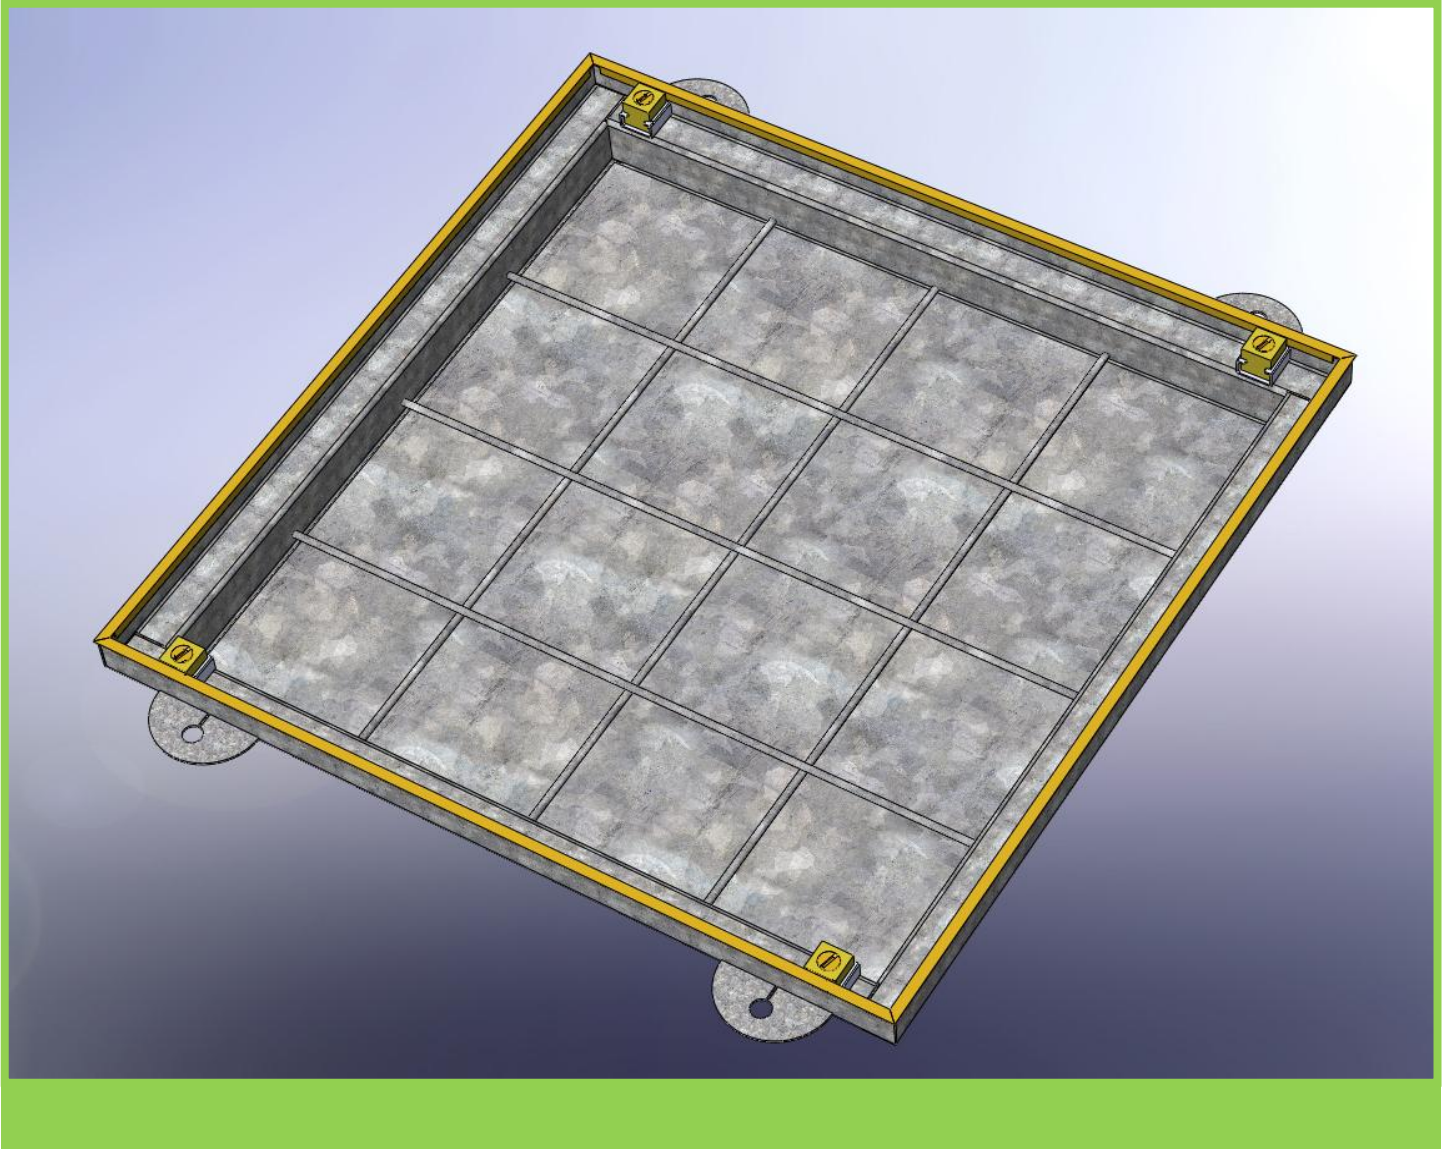

FAB TRAY S20



Certificate No: 1678


Fabweld Steel Products Ltd

Unit D11-D13 Court 2000 | Bridgnorth Road | Madeley | Telford | Shropshire | TF7 4JB
VAT Number GB 594212341 | Registered Number 3675964

FAB TRAY S20

Features and Benefits

- Manufactured from high grade mild steel with decorative brass trim to enhance visual finish
- Recess can accommodate a variety of floor finishes to blend with surrounding area
- Suitable for internal applications where aesthetic finishes are important
- Neoprene sealed to provide airtight gasket
- Precision machined dual purpose M12 locking & lifting points deters unauthorised cover removal
- Ideal for all types of footwear
- Lifting points compatible with standard eye bolts to aid mechanical removal
- Load tested to FACTA Class B
- Hot Dip Galvanised to BS EN: ISO1461
- Manufactured in accordance with ISO:9001 quality system

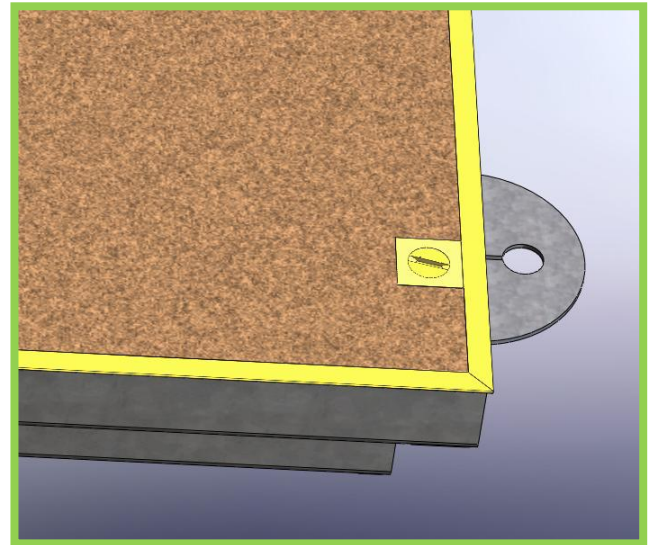

Standard Clear Openings

Part Number	Clear Opening (mm)	Overall Size (mm) (Not inc Lugs)	Minimum Rebate Required (mm)	Unfilled Weight (kg)	Approx. Filled Weight (kg)	FACTA Load Class†
RET00001	300x300	385x385x85	90x90	5.14	28	B
RET00003	450x450	535x535x85	90x90	9.25	57	B
RET00004	600x450	685x535x85	90x90	11.65	73	B
RET00005	600x600	685x685x85	90x90	12.00	92	B
RET00007	750x600	835x685x85	90x90	12.99	113	B
RET00008	750x750	835x835x85	90x90	15.99	134	B
RET00009	900x600	985x685x85	90x90	15.2	137	B

FACTA Classification Table

Guide	EN124 Comparison	Applicable SMWL	Applicable GLVW	Application
	B125	5.0 tonne	44 tonne	Conservatories, Shopping Malls, Pedestrian Precincts, Forecourts & Prestigious Commercial areas

Accessories

Lifting Key (manual lift): **COM00310**
 Replacement Locking Screw: **COM00065**
 M12 Threaded Lifting Eye (mechanical lift): **COM00215**
 High security screws available on request

Bespoke

This product can be manufactured in a variety of loadings & configurations to meet individual customer requirements. For more information contact our sales team on **01952 581430** or **sales@manholes.co.uk**

NOTE

†Load class figures assume that the cover is filled with fully cured concrete to Strength Class C40 or equivalent