




Fabweld Steel Products Ltd
Value and service for our customers through our people

Tel: 01952 581430 | Fax: 01952 586141
www.manholes.co.uk | sales@manholes.co.uk

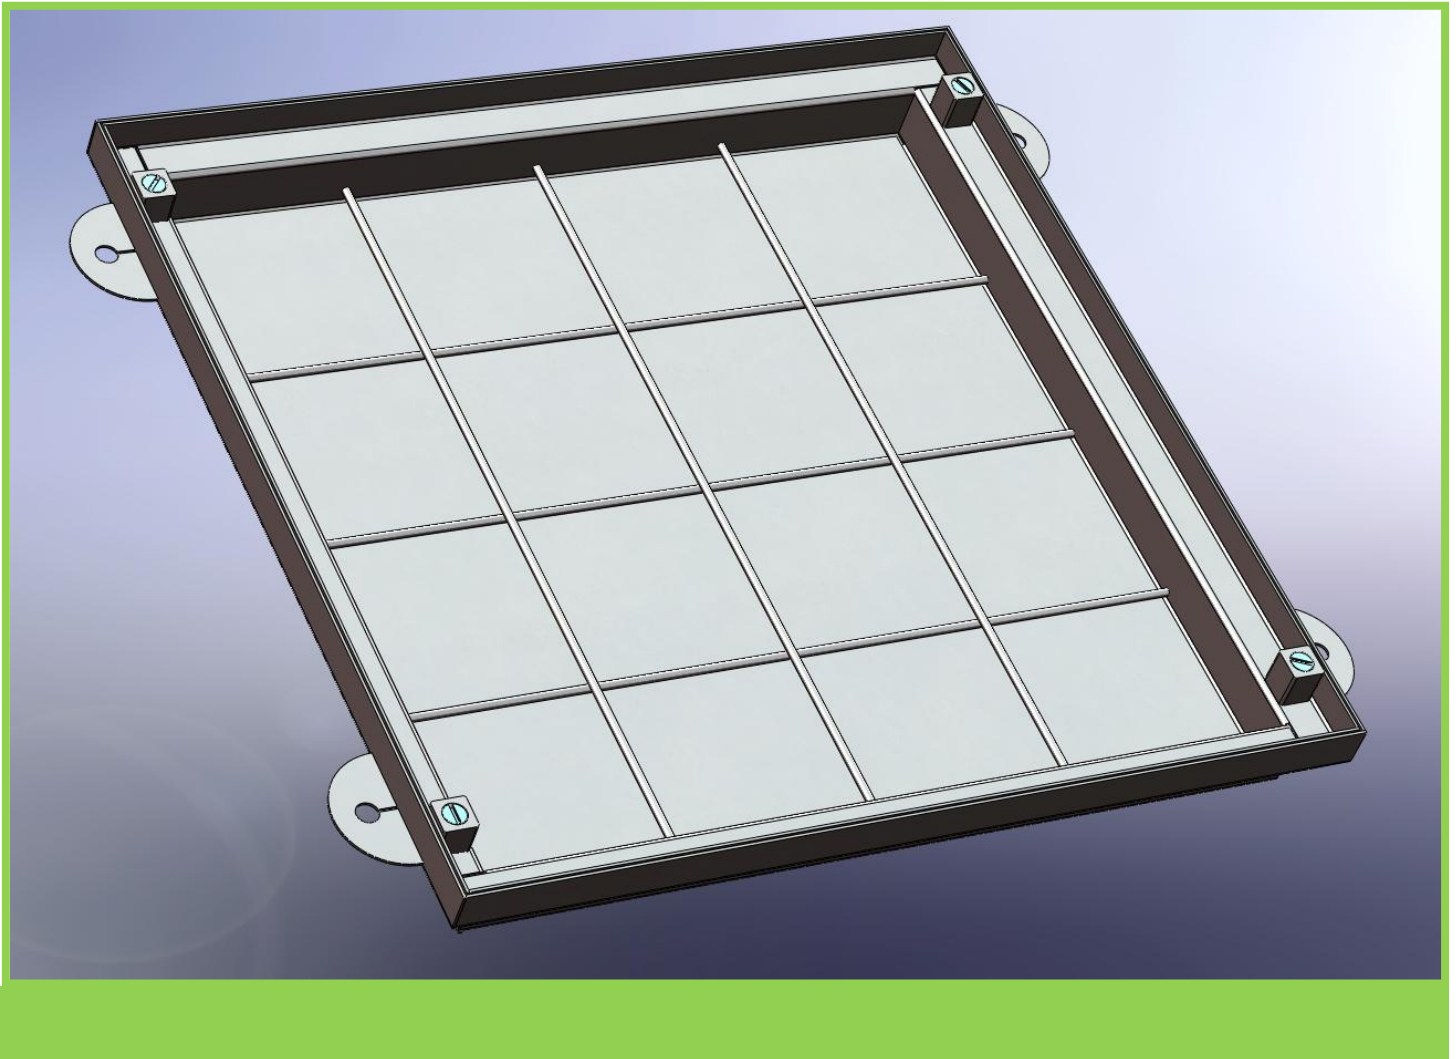

FAB TRAY S30



Certificate No: 1678

Fabweld Steel Products Ltd


Unit D11-D13 Court 2000 | Bridgnorth Road | Madeley | Telford | Shropshire | TF7 4JB
VAT Number GB 594212341 | Registered Number 3675964



FAB TRAY S30

Features and Benefits


- Manufactured from high grade corrosion resistant grade 316 stainless steel
- Ideal for use in Chemical plants, Swimming pool areas & similar applications
- Recess can accommodate a variety of floor finishes to blend with surrounding area
- Suitable for internal applications where aesthetic finishes are important
- Neoprene sealed to provide airtight gasket
- Precision machined dual purpose M12 locking & lifting points deter unauthorised cover removal
- Ideal for all types of footwear
- Lifting points compatible with standard eye bolts to aid mechanical removal
- Load tested to FACTA Class B
- Manufactured in accordance with ISO:9001 quality system

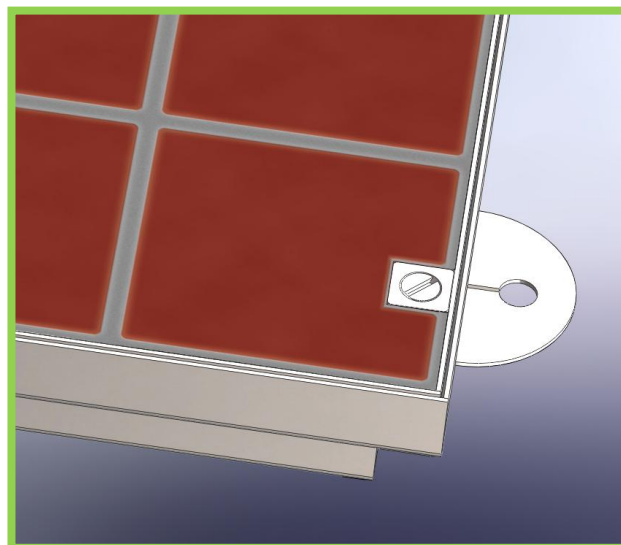

Standard Clear Openings

Part Number	Clear Opening (mm)	Overall Size (mm) (Not inc Lugs)	Minimum Rebate Required (mm)	Unfilled Weight (kg)	Approx. Filled Weight (kg)	FACTA Load Class†
RET00043	300x300	380x380x80	90x90	5.14	28	B
RET00044	450x450	530x530x80	90x90	9.25	57	B
RET00045	600x450	680x530x80	90x90	11.65	73	B
RET00046	600x600	680x680x80	90x90	12	92	B
RET00047	750x600	830x680x80	90x90	12.99	112	B
RET00048	900x600	980x680x80	90x90	15.2	137	B
RET00049	750x750	830x830x80	90x90	15.99	134	B

FACTA Classification Table

Guide	EN124 Comparison	Applicable SMWL	Applicable GLVW	Application
	B125	5.0 tonne	44 tonne	Pedestrian Precincts, Forecourts, Commercial Delivery & Parking areas, Chemical plants & Swimming pool areas

Accessories

- Lifting Key (manual lift): **COM00310**
- Replacement Locking Screw: **COM00056**
- M12 Threaded Lifting Eye (mechanical lift): **COM00215**
- High security screws available on request

Bespoke

This product can be manufactured in a variety of loadings & configurations to meet individual customer requirements. For more information contact our sales team on **01952 581430** or **sales@manholes.co.uk**

NOTE †Load class figures assume that the cover is filled with fully cured concrete to Strength Class C40 or equivalent