

FAB GRIP S10




Certificate No: 1678



FAB GRIP S10

Features and Benefits


- Manufactured from high grade mild steel
- FAB GRIP anti slip finish is hard wearing for durability & performance
- Ideal for external applications especially hazardous slip areas
- Outstanding anti slip abilities against conventional manhole covers
- Standard colours available* to compliment or contrast surroundings, other colours available on request
- All colours are UV Stable
- Badging & logo's can be applied
- Neoprene sealed to provide airtight gasket
- Precision machined dual purpose M12 locking & lifting points deters unauthorised cover removal
- Ideal for all types of footwear
- Lifting points compatible with standard eye bolts to aid mechanical removal
- Load tested to FACTA Class B
- Hot Dip Galvanised to BS EN: ISO1461
- Manufactured in accordance with ISO:9001 quality system

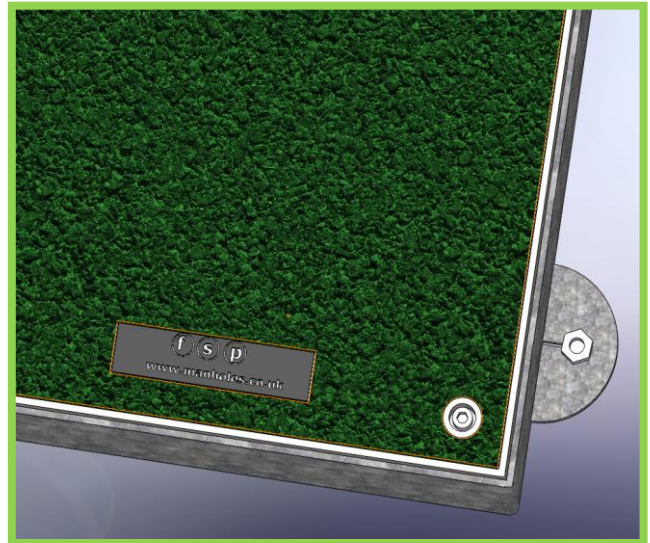

Standard Clear Openings

Part Number	Clear Opening (mm)	Overall Size (mm) (not inc lugs)	Minimum Rebate Required (mm)	Approx Cover Weight (kg)	Approx Total Weight (kg)	FACTA Load Class
SOT02665	450x450	610x610x80	140x85	24	37	B
SOT02666	600x450	760x610x80	140x85	35	49	B
SOT02575	600x600	760x760x80	140x85	49	65	B
SOT02667	750x600	910x760x80	140x85	63	81	B


FACTA Classification Table

Guide	EN124 Comparison	Applicable SMWL	Applicable GLVW	Application
	B125	5.0 tonne	44 tonne	Pedestrian Precincts, Forecourts, Commercial Delivery & Parking areas

Accessories

- Lifting Key (manual lift): **COM00310**
- Replacement Locking Screw: **COM00067**
- Replacement Plastic Plug: **COM00110**
- M12 Threaded Lifting Eye (mechanical lift): **COM00215**
- High security screws available on request

Standard Colours Available*

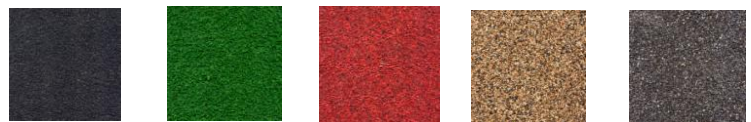

Bespoke

This product can be manufactured in a variety of loadings & configurations to meet individual customer requirements. For more information contact our sales team on **01952 581430** or **sales@manholes.co.uk**