




Tel: 01952 581430 | Fax: 01952 586141  
www.manholes.co.uk | sales@manholes.co.uk

Fabweld Steel Products Ltd  
Value and service for our customers through our people

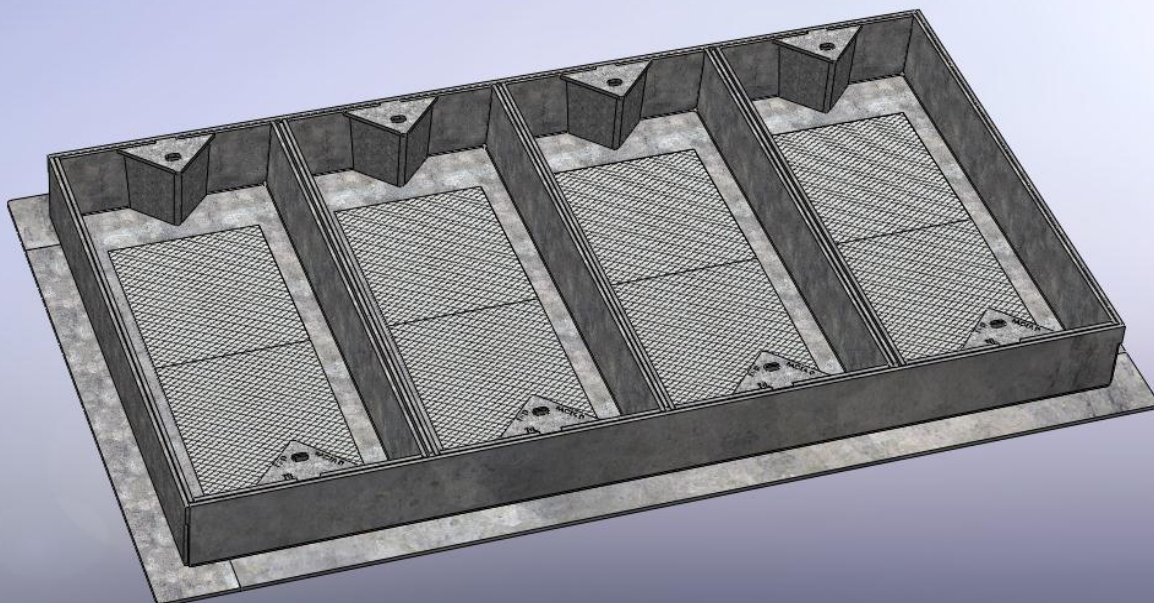

## FAB PAVE *SOLO SLIDE™* S60



Certificate No: 1678

**Fabweld Steel Products Ltd**


Unit D11-D13 Court 2000 | Bridgnorth Road | Madeley | Telford | Shropshire | TF7 4JB  
VAT Number GB 594212341 | Registered Number 3675964



## FAB PAVE *SOLO SLIDE™* S60

### Features and Benefits


- Manufactured from high grade 6mm mild steel to ensure longevity and stability under load
- Available from 100mm recess to accommodate 80mm and deeper infill to blend with surrounding area
- Expanded Mesh in base ensures an effective bond between pavior and cover when using recommended epoxy resin mortar
- Tapered covers and a flush soffit facilitate easy slide out removal of cover from frame
- One person operation when using *SOLO SLIDE™* key
- Tested unfilled to FACTA class B to ensure load is achieved when filled with any landscape material from paving bricks to tarmac
- Hot Dip Galvanised to BS EN: ISO1461
- Manufactured in accordance to ISO:9001 quality system
- In accordance with BT LN593 specification
- Design approved by Traffic for London
- Unique laser etched marking for chamber identification or ownership

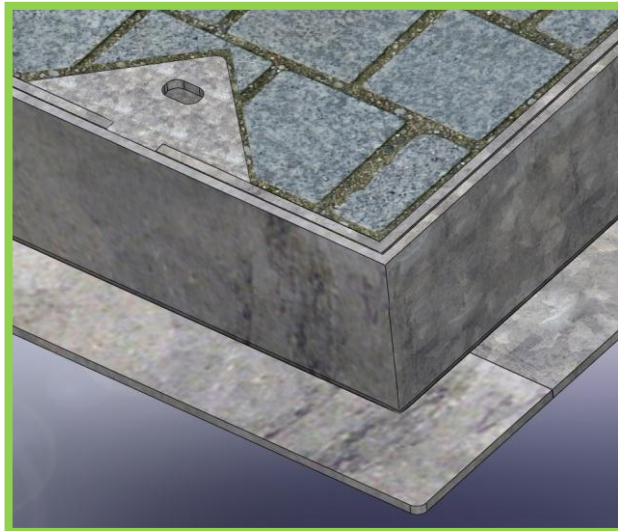

### Standard Clear Openings

Clear Opening (mm)	Overall Size (mm)	Minimum Rebate Required (mm)	Unfilled Weight (kg) *per cover	FACTA Load Class
450x450	572x572x118	680x680x120	25	C
600x450	722x572x118	830x680x120	30	C
600x600	722x722x118	830x830x120	22	C
900x600	1022x722x118	1130x830x120	21	C
1200x600	1322x722x118	1430x830x120	20	C

### FACTA Classification Table

Guide	EN124 Comparison	Applicable SMWL	Applicable GLVW	Application
	C250	6.5 tonne	Up to 44 tonne	Factories/industrial areas (where pallet & small fork-lift trucks operate including vehicles with special axle loads) & Kerb-side drainage

### Accessories

***SOLO SLIDE™* Key: COM00563 (shown in the picture opposite)**  
Our unique ergonomically designed lifting key facilitates simple and safe removal of covers. The functional design of the key ensures an upright posture for the operator and makes it extremely user friendly. This eliminates manual handling issues associated with removing infill access covers using standard lifting keys. All covers in this range can be easily and safely removed by a single operator when using our *SOLO SLIDE™* lifting key.



**This cover can also be supplied complete with integral locking points for more secure applications. Please contact a member of our sales team for more information on 01952 581430 or sales@manholes.co.uk**